


Hose reel OSM 420

EBINGER

Technisches Equipment



- Spring rewind mechanism
- Latching system
- Max. 18m hose - 5/8" hose
- Closed casing in painted steel
- Fixed and swivel mounting bracket
- Mountable in any position

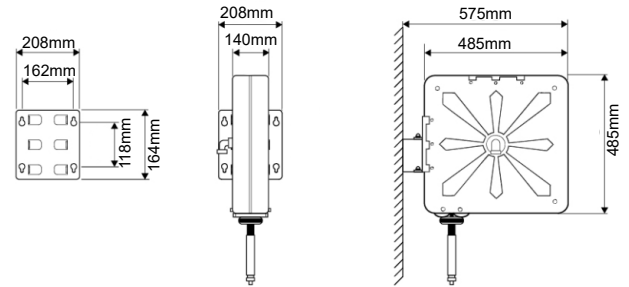

Painted steel



Medium	Length of the hose	Inner Ø	Max. pressure	Max. temp.	Swivel	Swivel connection	Armature	Item-No.
Cold water	without	-	20bar	90°C	brass	1/2" F	-	1.420.100
	20m	1/2"	12bar	50°C	brass	1/2" F	brass coupling	1.420.101
	15m	5/8"	10bar	50°C	brass	1/2" F	brass coupling	1.420.102
Hot water	without	-	20bar	90°C	brass	1/2" F	-	1.420.100
	15m	1/2"	15bar	90°C	brass	1/2" F	brass coupling	1.420.105
	12m	5/8"	15bar	90°C	brass	1/2" F	brass coupling	1.420.106
Compressed air	without	-	20bar	90°C	brass	1/2" F	-	1.420.100
	20m	10mm	20bar	50°C	brass	1/2" F	NW 7,2	1.420.103
	18m	13mm	20bar	50°C	brass	1/2" F	NW 7,2	1.420.104
Vacuum	15m	1/2"	5bar	50°C	brass	1/2" F	-	1.420.140
Grease	without	-	400bar	60°C	steel zincd	3/8" F	-	1.420.500
	12m	1/4"	400bar	60°C	steel zincd	3/8" F	1/4" M	1.420.501
	18m	1/4"	400bar	60°C	steel zincd	3/8" F	1/4" M	1.420.502
	10m	3/8"	400bar	60°C	steel zincd	3/8" F	3/8" M	1.420.503
	15m	3/8"	400bar	60°C	steel zincd	3/8" F	3/8" M	1.420.504
Oil	without	-	150bar	60°C	steel zincd	1/2" F	-	1.420.900
	10m	1/2"	150bar	60°C	steel zincd	1/2" F	1/2" M	1.420.901
	15m	1/2"	150bar	60°C	steel zincd	1/2" F	1/2" M	1.420.902

The changeover to RAL 7016 will take place successively

EBINGER

Technisches Equipment

Ebinger GmbH
Edesheimer Straße 51
D-76835 Rhodt /
Germany

Fon +49 (0)6323-937 465-0
Fax +49 (0)6323-937 465-20

info@ebinger-gmbh.com
www.ebinger-gmbh.com

