



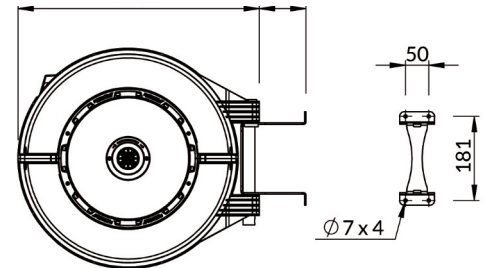

- Latching System
- Extension spring „Made in Germany“
- Adjustable spring tension
- Special smooth-running swivel joint
- Wall bracket 180° swivelling made of galvanised steel
- Casing made of polypropylene - UV-resistant and shockproof

5 years warranty
10 years spare parts availability



Casing made of polypropylene

Medium	Model	hose	Inner Ø	Max. pressure	Max. temp.	Swivel	Swivel connection	Armature	Item-No.
Cold water	DR 100-R3*	25m PVC-hose	1/2"	8bar	50°C	PVC	GD system	brass	1.100.101
	DR 200-R3*	20m PVC-hose	5/8"	8bar	50°C	PVC	brass coupling	brass	1.100.102
	DR 300-R3*	10m PVC-hose	3/4"	8bar	50°C	PVC	brass coupling	brass	1.100.103
Compressed air	AR-100-R3	25m Slidetex Soft	3/8"	17bar	50°C	PVC / brass	NW 7,2	brass	1.100.203
	AR-200-R3	20m Slidetex Soft	1/2"	17bar	50°C	PVC / brass	NW 7,2	brass	1.100.204
Pesticides	WP-200-R3	25m PU-hose	3/8"	17bar	-	PVC / brass	3/8" F	brass	1.100.305

*incl. 2m connection hose & brass spray gun

Optional accessories

Designation	Material	Item-No.
Floor bracket (heavy-duty version, e.g. for mounting on vehicles, Fig. 1)	galv. steel	1.100.001
Fixation of floor bracket, heavy-duty version	galv. steel	1.100.003
Floor bracket (light version, fig. 2)	galv. steel	1.100.004



Fig. 1

Fig. 2

